



Techniclean CPL

Micro-emulsion process cleaner with metal protection

Description

Castrol Techniclean™ CPL is an innovative, versatile, semi-synthetic cleaning fluid. Unlike common emulsion cleaning fluids that are susceptible to bacteria and instability, Techniclean CPL maintains a stable emulsion to prolong bath life and ensure long-term performance.

Application

Techniclean CPL effectively removes soils such as emulsions and synthetic metalworking fluids, light and medium viscosity metalworking oils, swarf, dust and dirt, oily- and thin-film rust preventives, hydraulic and lubricating oils, and flux residues.

It is suitable for use in cleaning equipment such as spray and flood wash. Techniclean CPL is multi-metal compatible as it is safe to use on ferrous and non-ferrous alloys.

This product leaves a light oily film that provides in-process corrosion protection and lubrication for subsequent operations.

Conditions of Use

Concentration Range:	2 - 10%
Temperature Range (low pressure spray, flood wash):	ambient - 65°C
Temperature Range (high pressure spray):	50 - 65 °C
Spray Pressure:	up to 600 bar

Optimum conditions of use are depending on the detailed application requirements and the amount and nature of the soil being removed.

Maximum spray pressure is subject to available water quality. Please contact your local Castrol representative for further advice.

Advantages


- Stable emulsion to extend fluid life and to reduce additive purchases and system recharges
- Versatility – this product has the ability to clean, prevent in-process corrosion and provide lubrication
- This enables reduction of product purchases and consolidates inventory
- Protects parts from in-process corrosion to eliminate costly rework as a result of rust
- Leaves a light oily film that reduces the need for a lubricant in certain assembly operations
- Remains stable in hard water to reduce usage and ensure system cleanliness
- Performs well on a variety of metals in various cleaning systems to allow for inventory consolidation

Typical Characteristics

Description	Test Method	Unit	Value
Concentrate			
Appearance	Visual	-	Light brown fluid
Density @ 20 °C	ASTM D1298	g/ml	0.97
Emulsion			
Appearance @ 5% in DI-water	Visual	-	Translucent fluid
pH-Value @ 5% in DI-water	ASTM E70/97	-	9.3
Type of residual film	-	-	Ultra-thin, oily

Concentration Control

THROUGH HAND HELD REFRACTOMETER: Factor: 1.4

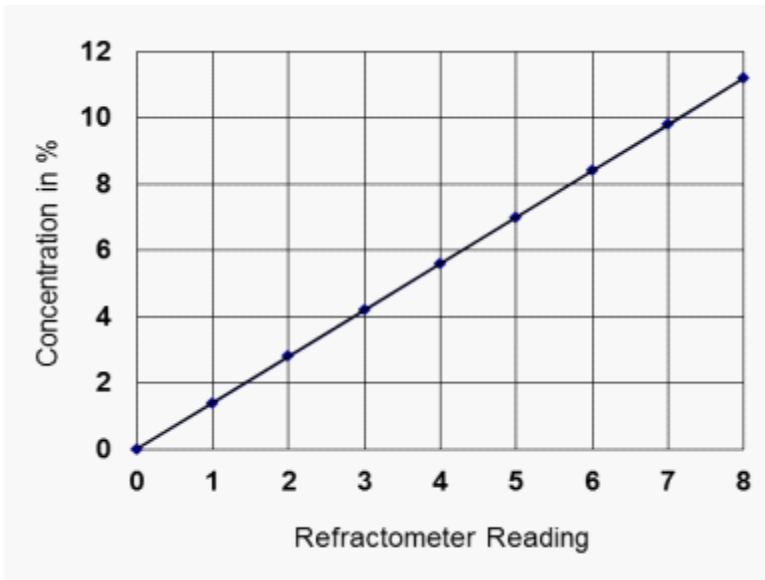

User Advice

Make up an emulsion by adding the Techniclean CPL to agitated water (preferably heated).

Check concentration, pH and bath level regularly, especially if used hot.

To reduce the risk of stability and corrosion issues caused by increasing contamination of water hardness and corrosive salts (e.g. chloride) it is recommended to fill up evaporation losses with deionised water.

The protective film must be completely dried before packaging.

Please consult your Castrol Account Manager for further questions regarding metal compatibility.

Storage

To avoid product deterioration always keep the container/drum tightly sealed. Store the product in a cool, dry place away from direct sunlight. Prevent exposure to frost and avoid water ingress. For optimum product stability, it is preferable to store the product indoors between 5°C and 45 °C / 41°F and 113°F.

For more details, please refer the product safety data sheet.

Techniclean CPL

08 Dec 2014

Castrol, the Castrol logo and related marks are trademarks of Castrol Limited, used under licence.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by either BP plc or its subsidiaries for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information.

Castrol Industrial, Technology Centre , Whitchurch Hill , Pangbourne , Reading , RG8 7QR , United Kingdom

www.castrol.com/industrial